

INFORCE WMLx™ WHITE MULTI-FUNCTION WEAPON MOUNTED LIGHT

INFORCE®

The INFORCE WMLx White produces 500 lumens of white light with a concentrated spot and a generous peripheral beam. The WMLx provides ideal illumination for target identification and acquisition at long distances as well as being perfectly suited to engage for more concentrated work. Features white light with momentary and constant modes plus a strobe that is easily disabled with a simple sequence. Its angled activation button is comfortable to operate without interference of wires from tape switches. The integrated patent pending rail clamping system is compact, convenient and secure. Two distinct easy-to-operate lockout systems incorporated to avoid accidental discharge.



LIGHT OUTPUT:

500 lumens

RUN TIME:

2 Hours

MULTI-FUNCTION BUTTON /

ACTIVATION SWITCH FEATURES:

- Constant, Momentary and Strobe
- Strobe Disable

INTEGRATED MOUNTING SYSTEM is compact, convenient and secure. NAR/MIL-STD-1913 rail compatible. Pivoting clamp fastens the light to the rail. No tools needed.

ANGLED ACTIVATION SWITCH is comfortable and easy to operate without interference of wires from tape switches.

(2) LOCKOUT SYSTEMS:

- Safety Lever
- Head Rotation

Bezel Diameter: 1.125 in. / 2.857 cm.

Length: 5.34 in. / 13.54 cm.

Weight with batteries: 4 oz. / 113.4 g.

Additional Features and Benefits:

(2) Lithium 123A Batteries Included

FIBER COMPOSITE BODY is ultralight and durable.

PATENTED HEAT-RELEASING VENTS maximize LED performance and keep the light cool.

HIGH EFFICIENCY EMITTERS provide longer run times and are virtually immune to failure.

HIGH-IMPACT WINDOW

WATERPROOF to 66 feet.

Head removes for battery replacement.

ITEM NUMBER	BODY COLOR	UPC 61192-
INF-WMLX-B-W	Black	60126-1
INF-WMLX-F-W	Flat Dark Earth	60128-5

CAUTION: Do not use counterfeit or inferior-quality batteries, as they do not meet safety and performance standards and have been the cause of personal and property damage. To ensure safety and performance, the purchase of established brands, such as Duracell®, Energizer® or Panasonic® is recommended.

©2015 EMISSIVE ENERGY CORP. An ISO9001:2008 Certified Company.

135 Circuit Drive, North Kingstown, RI 02852; Tel: 401-294-2030; Fax: 401-294-2050; www.inforce-mil.com

INFORCE and EMISSIVE ENERGY are registered trademarks of Emissive Energy Corp. WMLx and the distinctive shapes, styles, packaging configurations and overall appearances of INFORCE lighting systems are trademarks of Emissive Energy Corp. Designed and manufactured under one or more of the following U.S. patents: 6,966,677; 7,121,680; 7,153,004; 7,652,303; D526,730; D565,220; D596,329. European: 467295-0001; 467295-0002. Other U.S. and international patents are pending.

Designed and assembled in the U.S.A. of domestic and foreign components. INFORCE products qualify as "American Made" under the Buy American Act.




INFORCE WMLx MOUNTING SYSTEM – PATENT PENDING

TO ATTACH THE LIGHT

1. Loosen the screw.
2. Press on the clamp to open its jaw and attach the light to the rail.
3. Finger tighten the screw; no tools are required.

TO REMOVE THE LIGHT

Loosen the screw, apply pressure to the clamp and remove the light from the rail.



INFORCE WMLx WHITE LIGHT SWITCH OPERATION

- For **momentary** mode, with LED lever pointing toward the back of the light, press and hold the button/pressure switch to operate the light; release to turn off the light.
- For **constant** mode, with LED lever pointing forward, press the button/pressure switch once for constant white light. The next press of the button will turn the light off. In constant mode, the light can also be used as a momentary light. Press and hold the button/pressure switch for more than 1/2 second to turn the light on. When the button is released, the light will turn off.
- For **strobe** mode, with LED lever pointing forward, two quick presses of the button/pressure switch will activate the strobe.



WMLx White, LED Lever in Position (A) for Constant and Strobe Functions

TO DISABLE THE STROBE FUNCTION

1. Unscrew the light head one revolution to the lockout position.
2. Press and hold the button/pressure switch.
3. While holding the button/pressure switch, tighten the head and then release the button. The strobe feature is now disabled.
4. To reactivate the strobe function, repeat steps 1, 2 and 3.



WMLx White, LED Lever in Position (B) for Momentary Light

LOCKOUT SYSTEMS

Two distinct lockout systems have been incorporated to avoid accidental discharge when carrying the light:

Option 1. A patent pending safety lever to protect the activation button. Simply lift the lever to cover the button/pressure switch for lockout and lower the lever for light activation.

Option 2. Lock out by unscrewing the light head one revolution.




Safety Lever and Head Lockout Systems

BATTERY REPLACEMENT

Your INFORCE WMLx light comes with two (2) high-efficiency 123A Lithium batteries.

To insert the batteries:

1. Unscrew the head to remove it from the body.
2. Insert the batteries into the open body, positive (+) end first.
3. Re-thread the head onto the body.

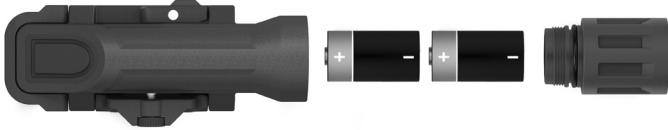

CAUTION:

Lithium batteries can explode or cause burns if recharged, shorted, disassembled or exposed to water, high temperatures or fire. Please follow the the manufacturer's guidelines for safe storage, use and disposal.

If the light has been submerged, dry the exterior of the light prior to replacing the batteries. Fresh and salt water will damage internal electronics and batteries.

Do not use counterfeit or inferior-quality batteries, as they do not meet safety and performance standards and have been the cause of personal and property damage. To ensure safety and performance, the purchase of established brands, such as Duracell®, Energizer® or Panasonic® is recommended.

Notes:

- Batteries can leak and may cause damage to the inside of the light. Remove the battery if the light will be stored for more than 2 weeks.

MAINTENANCE/CLEANING INSTRUCTIONS

Your INFORCE WMLx light has been designed to provide maximum performance with minimum maintenance. Occasionally clean threads (1) and head and internal contact surfaces (2) with an alcohol swab and apply a thin coat of silicon-based lubricant to the rubber O-ring (3); see illustration. Do not use a petroleum-based lubricant. Should the light become dirty from dust, sand or caked-on mud, rinse the fully assembled light with water and dry with a soft cloth.

